

# Environmental Product Declaration

In accordance with  
ISO 14025: 2006 and EN 15804:  
2012+A2:2019/AC:2021 for:

**Technishield Façade**



THE INTERNATIONAL EPD® SYSTEM  
EPD INTERNATIONAL AB  
EPD REGISTRATION NUMBER:  
EPD-IES-0015299  
ISSUED ON 2024-08-29  
VALID TO 2029-08-29

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)

This is an EPD of multiple products, based on worst-case results; it has been verified by an independent third party.



# Optima

# Introduction

---

This EPD provides environmental performance indicators for Optima's Technishield Façade curtain-wall system. It is a multiple-product, cradle-to-gate with modules A4, A5, C1–C4 & D EPD in accordance with the requirements of EN 15804.

The EPD is based on a life cycle assessment (LCA) study which used production data for the 12-month period 1st November 2022 to 31st October 2023 from OPL's manufacturing facility in Radstock, UK.

The EPD presents details of the LCA, a description of the product life cycle it covers, values for the environmental indicators specified by EN 15804:2012+A2:2019, with a brief explanation of those results.

The declared unit is one square metre (1m<sup>2</sup>) of Technishield Façade curtain-wall system.

## Company Profile

---

OPL designs and produces steel-framed partitions from its manufacturing base in Radstock. The manufacturing facility uses the latest design techniques to ensure high quality products which are rigorously tested both in-house and externally before going to market.

The OPL product range is sold and installed through the Optima contracting divisions in the UK, Dubai and Kuala Lumpur and through a worldwide network of selected contracting partners.

OPL puts quality at the heart of design and production management, and operates a quality management system accredited to ISO 9001: 2015 (bmtrada certificate 2367).

In keeping with OPL's determination to drive good environmental practice in the entire product cycle, OPL operates an environmental management system accredited to ISO 14001: 2015 (bmtrada certificate 1827). In addition, it is a requirement on all our principal supply chain partners that they also operate similar systems.

### Contact

Andrew Stammers, HSQE Manager  
Andrew.Stammers@OptimaSystems.com  
T: +44 (0) 1761 433461

### Optima Products Limited

www.optimasystems.com  
Mill Road, Radstock,  
Bath BA3 5TX, UK

## TECHNISHIELD FAÇADE GLAZED PARTITIONS

Programme Information	
EPD programme:	The International EPD® System
EPD programme operator:	EPD International AB - Box 210 60 - SE-100 31 Stockholm - Sweden <a href="http://www.environdec.com">www.environdec.com</a>
Accountabilities for PCR, LCA and independent, third-party verification	
EPD based on Product Category Rules (PCR):	The CEN standard EN 15804:2012 + A2:2019 serves as the core PCR
	The International EPD® System's PCR 2019:14 Construction products (EN 15804:A2), Version 1.3.4, 2024-04-30
PCR review conducted by:	The Technical Committee of the International EPD® System; see <a href="http://www.environdec.com">www.environdec.com</a> for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile The review panel may be contacted via <a href="mailto:info@environdec.com">info@environdec.com</a>
LCA conducted by:	Chris Foster, EuGeos Limited - UK - <a href="http://www.eugeos.co.uk">www.eugeos.co.uk</a>
LCA software:	openLCA from GreenDelta
Background data:	ecoinvent database (v3.8)
Independent verification of this EPD and data, according to ISO 14025/2006, via:	EPD verification by individual verifier: Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Third party verifier:	Ugo Pretato - Studio Fieschi & soci (Italy); Approved by The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier:	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPD within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must:

- be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs;
- cover products with identical functions, technical performances and use (e.g. identical declared/functional units);
- have equivalent system boundaries and descriptions of data;
- apply equivalent data quality requirements, methods of data collection, and allocation methods;
- apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors);
- have equivalent content declarations; be valid at the time of comparison.

For further information about comparability, see EN 15804 and ISO 14025.



# Product Information

## TECHNISHIELD FAÇADE



Technishield Façade is a thermally-insulated curtain wall system of mullion and transom construction, using a dry glazing system. In the standard version, mullions (vertical frame elements) 45mm wide x 110mm deep and transoms (horizontal frame elements) 45mm high x 90mm deep are used; more robust 60mm wide mullions are available as are less deep mullions & transoms. The system is available with different fire ratings from "EI30" to "EI120", the glazing thickness and type varying according to the fire rating. The framework is constructed from powder-coated mild steel profiles.

This EPD applies to all the Technishield Façade systems available in the standard versions (45mm wide x 90 or 110mm deep) with 13mm safety glass to the more robust versions (60mm wide) with 52mm safety glass.

Calculations are based on a Façade module 5m high by 2.9m wide using 60mm mullions and transoms, glazed with 52mm laminated safety glass, correlating with the highest fire rating available (EI120).

Optima Technishield Façade is classified 42120 under the UN CPC system v2.1.

# Product Information

---

## Manufacturing

OPL's Radstock manufacturing facility carries out the following manufacturing activities:

- Storage of raw materials, components and packaging
- Finishing and coating of aluminium and steel profiles
- Preparation of Technishield Façade framework

## Packaging

Glass is transported with minimal packaging secured to reusable frames that are typically integrated in the vehicle. OPL uses plastic film and cardboard to protect framework elements or partitions and curtain walls in transit.

## Installation

Installation is a largely manual operation involving the use of hand-held power tools. Any crane operations required to hoist curtain wall elements into place are omitted from the LCA.

## Product use and maintenance

Technishield Façade curtain walls are passive in use. Maintenance and inspection should be carried out in accordance with the published Optima operation and maintenance schedule – see [www.optimasystems.com](http://www.optimasystems.com) for further details.

## End-of-life

It is recommended that partitions being permanently removed from site, and with no planned re-use, be separated from the general waste disposal regime and the glass and steel components stripped out for potential recovery and/or recycling using regulated schemes.

The European Waste Catalogue (EWC) codes below apply to the product or parts of it when removed from the building:

- EWC 17 02 02 Glass
- EWC 17 04 02 Aluminium
- EWC 17 02 03 Plastic
- EWC 17 04 05 Iron and steel

## Residual risks and emergencies

There are no residual risks associated with the normal day to day use of Optima's systems in the context for which they are designed and specified.

## Further product information

Detailed product information and datasheets can be found on our website: [www.optimasystems.com](http://www.optimasystems.com)

# Product Information

## Content information

The material compositions of OPL's system characterised in this EPD are shown below. The masses quoted are for Technishield Façade with 52mm glass and 60mm mullions and transoms. The masses quoted are indicative and do not constitute a product specification.

Components/Materials	Weight (kg)*	Post-consumer material, (weight %)*	Biogenic material (weight % and kg C /DU)*
Aluminium	1	81	0
Glass	107	0	0
Steel	15	unknown	0
Plastics	2.5	0	0
Total	126	<1	0

Packaging materials	Weight kg*	Weight vs product (%)*	Biogenic material weight (kg C /DU)*
Plastics wrapping	<0.1	0	0
Cardboard	<0.1	0	<0.01
Total:	<0.1	0	<0.01

\* values per declared unit (DU)

At the time of data collection no substance on the "Candidate List of Substances of Very High Concern for authorisation" derived under REACH is present in this system either above the limits for registration with the European Chemicals Agency or in excess of 0.1 weight-% of the product.

# LCA Information

## LCA Scope

This section of the EPD records key features of the LCA on which it is based. The LCA was carried out by EuGeos using openLCA software and production data for a continuous 12-month period between 1st November 2022 and 31st October 2023 from OPL's manufacturing facility in Radstock, UK. Background data were taken from the ecoinvent database (v3.8). The scope of the EPD is defined using the modular approach set out in EN 15804.

Product stage			Construction process stage		Use stage							End of life stage				Benefits & loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste disposal	Disposal	Reuse- recovery- recycling- potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared X included in LCA - ND: module not declared - NR: module not relevant																
X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography																
GLO	GLO	GB	GB	GB	-	-	-	-	-	-	-	GB	GB	GB	GB	GLO
Specific data used																
<10%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - products																
+0/-54%*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - sites																
0%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

GLO: global

GB: United Kingdom

\* Difference for a system glazed with 13mm glass rather than 52mm glass.

# LCA Information

---

## Declared unit

The declared unit (DU) is one square metre (1m<sup>2</sup>) of Technishield Façade curtain wall system. Refer to the content declaration for the mass of the declared unit

## System boundaries

This EPD covers the production stage (modules A1-A3), delivery to site (A4), on-site installation (A5), end-of-life management (modules C) and module D (see previous table). As required by the PCR, modules A1-A3 are declared in aggregated form:

- A1 - raw material extraction and processing, and the processing of secondary material input
- A2 - transport of raw materials and secondary material inputs to the manufacturer
- A3 - manufacturing of the construction product and packaging
- A4 - delivery of construction products to the building site
- A5 - assembly
- C1 - removal from the building
- C2 - transport to waste treatment facility
- C3 - waste treatment
- C4 - final disposal
- D - benefits associated with recycling in a different product system

Modules A1, A2 and A3 comprise the product stage and are declared as one aggregated module A1 – A3, as required by the PCR. This stage includes the extraction and manufacture of raw materials, intermediate products and energy, as well as waste processing up to the end-of-waste state (i.e. no longer considered a waste material) or disposal of final residues arising during the product stage.


Module D provides an estimate of the benefits (and/or environmental load) that would accrue to a different product system were the product be recycled after use at current recycling rates and using current technologies.



# LCA Information

All upstream resource extraction and manufacturing processes are included in the system. All energy used in factories and offices at OPL's Radstock site is included; energy used in OPL's offices at locations other than Radstock is excluded. Capital equipment and its maintenance are excluded from the foreground system but capital equipment is included in the background datasets used.

The product life cycle covered by this EPD is illustrated below.

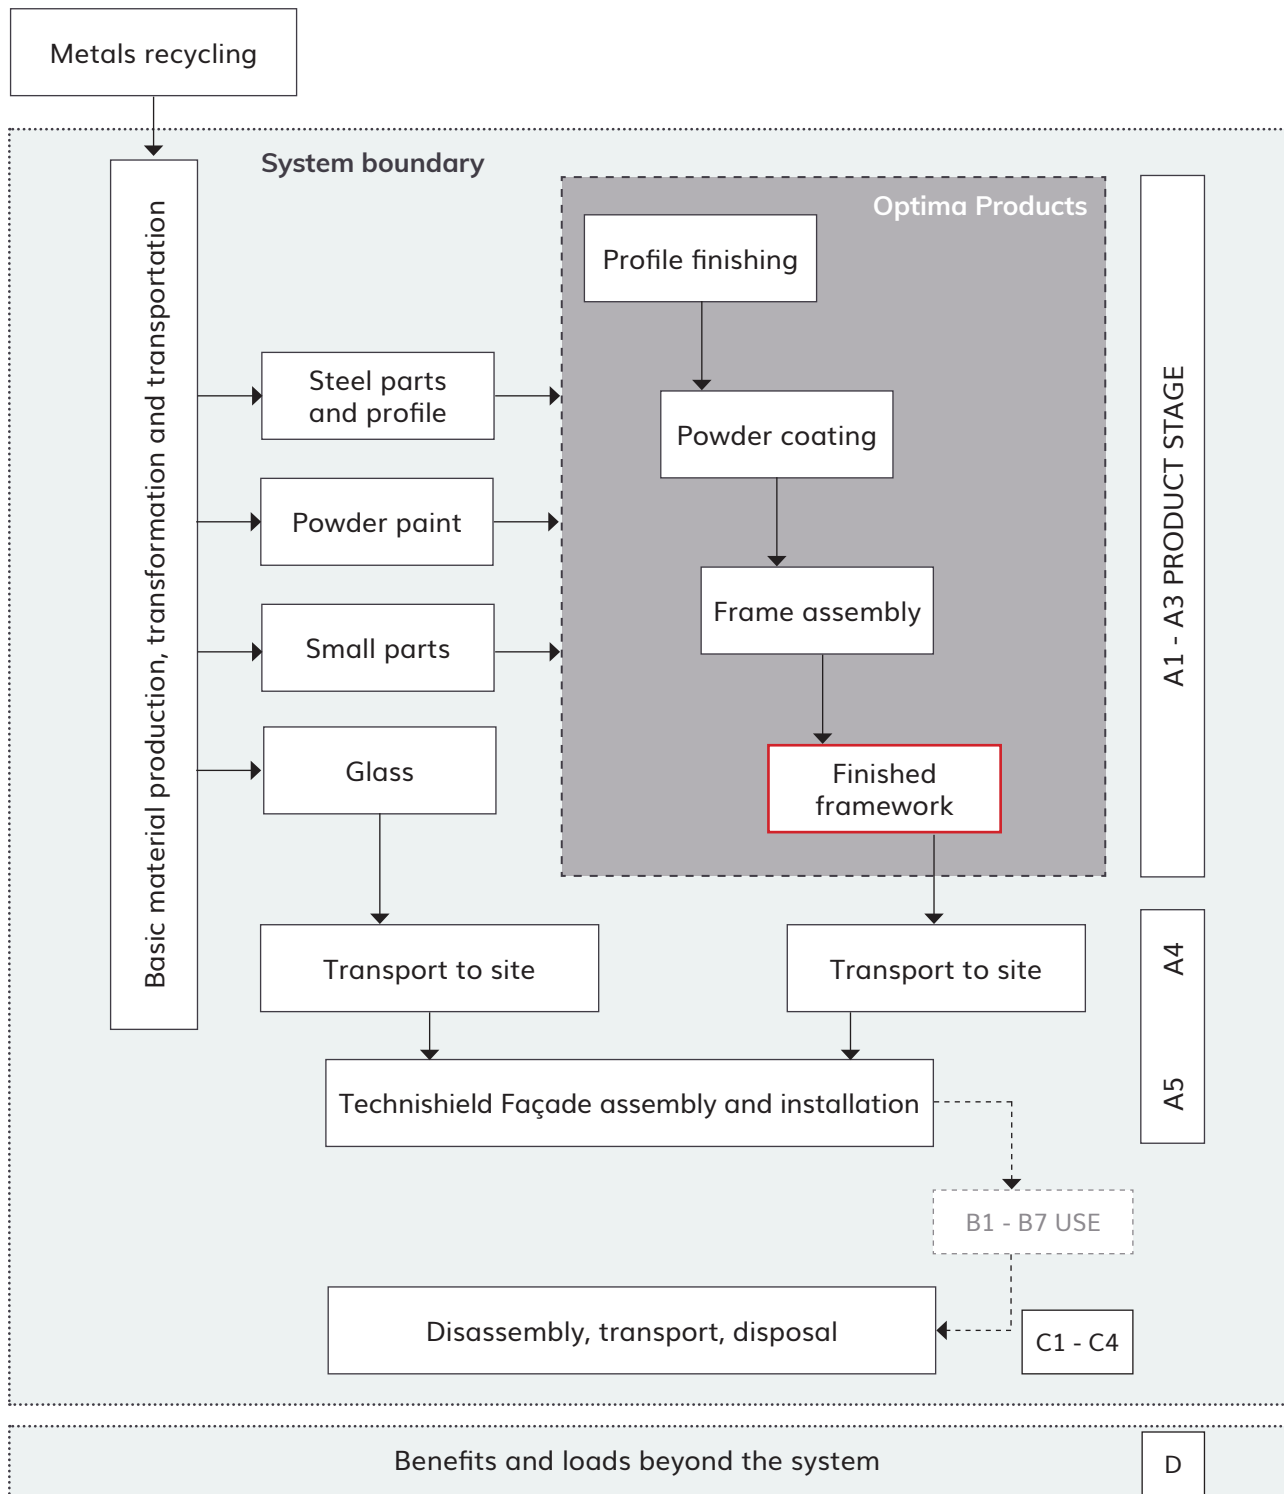

# LCA Information

---

## Geographical Scope

Modules A1 - A3 represent production at the manufacturing facilities in Radstock, UK from raw materials sourced from European suppliers and global supply-chains of basic commodities; modules A4 & A5, delivery and installation in the UK; modules C, end-of-life scenarios in the UK.

## Reference Service Life

The use phase ('B' Modules) is not declared therefore no specific reference service life for the product is applied

## Primary data - time representativeness

Data used for this EPD were collected following guidance in ISO 14044:2006; the most current available data were used in accordance with EN 15804.

The manufacturer-specific data used in LCA calculations cover a period of one year from 1st November 2022 to 31st October 2023. They are therefore based on 1 year averaged data and have been updated within the 5 years prior to publication of the EPD. These data were checked to ensure that sufficient materials and water were included within the inputs to account for all outputs, including products and wastes. Their technological coverage reflects physical reality for the declared product.

## Background data

Background (generic) data for raw material inputs and fuels were taken from the ecoinvent v3.8 database, supplemented where necessary to ensure the data used are as representative as possible of the materials actually used by OPL. This fulfils the EN 15804 requirement that generic data used in the LCA have been updated within the last 10 years.

Data quality has been reviewed for all processes that contribute significantly to the overall LCA.

## Cut-off criteria

According to EN 15804 and the PCR, flows can be omitted (cut-off) from a core process in the LCA up to a maximum of 1% of the total mass of material inputs. The total of input flows omitted in this way for any single module must not exceed 5% of the total energy usage and mass inputs for that module. The following must be included in all cases, regardless of the proportion of mass or energy they represent:

- inputs giving rise to significant environmental effects or energy use in their extraction, use or disposal
- inputs or outputs classified as hazardous waste

The data collected from OPL encompassed all raw materials, packaging materials and process aids, as well as associated transport to the manufacturing site. Process energy and water use, and direct production waste are included within the data. There are no emissions to air or water apart from un-monitored combustion gases and trade effluent; these are quantified by virtue of mass balance (trade effluent) or by their inclusion in generic processes characterising inputs (gas combustion). Non-hazardous material inputs amounting, in combination, to <0.5% of all inputs during the data period were omitted from the LCA.

## Allocation

In the background data, the ecoinvent default allocation is applied to all processes except those in which secondary materials are used, where the "cut-off" allocation is applied. This ensures that secondary materials are free of upstream burdens that arise prior to their reaching the "end of waste" state, in accordance with Section 6.3.4.2 of EN 15804.

Manufacturing data for OPL's Radstock facility have been sub-divided where possible to avoid allocation. Remaining inputs and outputs are allocated on the basis of physical relationships.

# LCA Information

## Assumptions and estimates

Inputs to and outputs from the system are accounted for over a 100-year time period; long-term emissions are therefore omitted from the LCIA.

The “primary energy used as material (PERM; PENRM)” indicators are calculated using - as characterisation factors - published values for constituent materials which can yield energy on combustion, where available, and from published calorific values where PERM or PENRM values are not available.

In this EPD, the following values are used:

- renewable primary energy as material: wood - 16MJ/kg; cardboard – 14MJ/kg
- non-renewable primary energy as material: 27 MJ/kg for all polymer content

Energy used as raw material is declared as an input to the module where it enters the product system and is only declared as an output if it leaves the product system as useful energy; energy in materials that is assumed lost (in landfill or incineration) remains as part of the indicator for energy used for raw materials.

“Primary energy as fuel” indicators (PENRE, PERE) are calculated as the total primary energy demand minus primary energy used as material.

## Electricity modelling

OPL purchases electricity on a renewable tariff supplied from wind generation and backed by REGO; the carbon footprint of the delivered electricity (GWP-GHG) is 0.032kgCO<sub>2</sub>e/kWh. In the LCA this is modelled according to the conventional ecoinvent approach: production is represented by a mix of high-voltage generating sources, while transmission losses, grid infrastructure and emissions of ozone and nitrous oxide are included in the transformation of this high-voltage production mix to medium-voltage supply. The high-voltage production mix is approximately 57% offshore and 43% onshore wind generation. The ratios of generating sources reflect the ratios of those sources in the wind-derived fraction of the ecoinvent dataset for average UK high-voltage electricity production.

## Scenarios

Delivery of the product to users’ sites, installation and transport to waste processing and final disposal are modelled using scenarios. The relevant parameters for the transport scenarios are shown in the table below.

### Module A4

Module A4 uses a scenario for transport from the factory to the construction site; the parameters applied in this scenario are set out in the table below.

Scenario parameters - transport A4	
Parameter	Quantity and unit
Vehicle type	lorry
Vehicle load capacity	16t
Fuel type & consumption	diesel, 0.1 l/km
Volume capacity utilisation factor	1
Capacity utilisation (including empty returns)	c.35%
Distance to site	200 km
Bulk density of transported products	n/a (mixed materials)

# LCA Information

## Module A5

Installation (Module A5) is modelled on the basis of information from OPL. Consumption of 0.05kWh electricity per declared unit is assumed, to account for the use of hand-held power tools. Cardboard and plastic films are assumed to be landfilled.

## Modules C

Technishield Façade curtain walls are assumed to be demolished using diesel-fuelled mobile equipment, the declared unit requiring 2.5MJ of fuel.

In the end-of-life modules, aluminium and steel are assumed to be separately collected and recycled, with glass recovered for use as aggregate along with other inert materials. Both the glass and the metals are assumed to be treated by compacting and/or shredding in Module C3.

Transport to waste treatment (Module C2) is for metals only; glass is assumed to be recovered at the construction site.

The polymer remaining after separation of glass and metals are assumed to be disposed of in landfill; as a simplification, these materials are modelled as mixed plastic waste.

Scenario parameters - transport C2	
Parameter	Quantity and unit
Vehicle type	lorry
Vehicle load capacity	10t
Fuel type & consumption	diesel, 0.1 l/km
Volume capacity utilisation factor	1
Capacity utilisation (including empty returns)	c.33%
Distance to site	50 km
Bulk density of transported products	n/a (mixed materials)

## Module D

Module D quantifies the benefits and loads associated with recycling materials and the exported energy from waste management activities, were those recycled materials and recovered energy to be used in another product system. Net output quantities of materials used in the Module D calculation are shown in the table below, with the associated "quality factors" and the virgin materials assumed to be displaced.

Scenario parameters - Module D					
Output to recycling/recovery	Assumed fate	Displaced input flow	Quality factor	Net output Quantity	Units
Aluminium	100% recycled	primary aluminium ingot	1	0.18	kg
Glass	recovered	limestone aggregate	1	107	kg
Steel	100% recycled	generic converter steel after remelting of recycled steel in EAF	0.9	13.6	kg

# LCA Information

In calculating the net output quantities, architectural glass is assumed to have no recycled content; for aluminium the recycled content specified by Hydro for Circal is applied (81%); for steels, the recycled content of steels is assumed to be 10%.

## Environmental indicators

This EPD contains environmental information about Optima's Technishield Façade in the form of quantitative indicator values for a number of parameters, which encompass calculated environmental impact potentials, resource and energy use, waste generation and material and energy outputs from the product system that may be reused, recycled or recovered into other, unspecified product life cycles; these are shown on the following pages.

The EF 3.0 package has been used for calculating the environmental impacts.

The environmental indicator results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Parameter	Abbreviation	Units
<b>Potential environmental impacts</b>		
Climate change – GWP fossil	GWP-fossil	kg CO <sub>2</sub> eq
Climate change – GWP biogenic	GWP-biogenic	kg CO <sub>2</sub> eq
Climate change – GWP land transformation	GWP-luluc	kg CO <sub>2</sub> eq
Climate change – GWP total	GWP-total	kg CO <sub>2</sub> eq
Climate change - GWP fossil & land transformation <sup>1</sup>	GWP-GHG	kg CO <sub>2</sub> eq
Acidification potential	AP	mol H <sup>+</sup> eq
Eutrophication – freshwater	EP-freshwater	kg P eq & kg PO <sub>4</sub> <sup>3-</sup> eq
Eutrophication – marine	EP-marine	kg N eq
Eutrophication – terrestrial	EP-terrestrial	mol N eq
Photochemical ozone formation	POFP	kg NMVOC eq
Ozone depletion	ODP	kg CFC-11 eq
Depletion of abiotic resources – minerals & metals <sup>2</sup>	ADPMM	kg Sb eq
Depletion of abiotic resources – fossil fuels <sup>2</sup>	ADPFF	MJ, ncv
Water (user) deprivation potential <sup>2</sup>	WDP	m <sup>3</sup> world-eq deprived



# LCA Information

Parameter	Abbreviation	Units
<b>Resource use</b>		
Renewable primary energy as energy carrier	PERE	MJ
Renewable primary energy resources as material utilisation	PERM	MJ
Total renewable primary energy use (sum of the two parameters above)	PERT	MJ
Non-renewable primary energy as energy carrier	PENRE	MJ
Non-renewable primary energy resources as material utilisation	PENRM	MJ
Total non-renewable primary energy use (sum of the two parameters above)	PENRT	MJ
Use of secondary material	SM	kg
Use of renewable secondary fuels	RSF	MJ
Use of non-renewable secondary fuels	NRSF	MJ
Net use of fresh water	FW	m <sup>3</sup>
<b>Wastes</b>		
Hazardous waste disposed	HWD	kg
Non-hazardous waste disposed	NHWD	kg
Radioactive waste disposed	TRWD	kg
<b>Output flows</b>		
Components for re-use	CRU	kg
Materials for recycling	MFR	kg
Materials for energy recovery	MER	kg
Exported energy - electrical	EEE	MJ
Exported energy - thermal	EET	MJ

1 - GWP-GHG includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013

2 - The results of this environmental impact indicator shall be used with care because either the uncertainties associated with the results are high or there is limited experience with the indicator

# LCA Results

## TECHNISIELD FAÇADE (with 52mm glass)

Environmental indicator results for all declared modules are shown in the tables on the following pages for the declared unit of 1m<sup>2</sup> (52mm glass). The A1-A3 modules are shown on an aggregated basis as mandated by PCR2019:14 §5.4.5; the results of modules A1-A3 should not be used without considering the results of module C. The mass of the declared unit is approximately 126kg (including packaging).

	Unit	A1 - A3	A4	A5	C1	C2	C3	C4	D
<b>Environmental Impacts (EN 15804 + A2)</b>									
GWP-total	kg CO <sub>2</sub> eq	2.14E+02	6.32E-01	9.62E-02	2.30E-01	1.98E-01	7.16E-01	2.46E-01	-1.08E+01
GWP-fossil	kg CO <sub>2</sub> eq	2.13E+02	6.31E-01	1.67E-02	2.30E-01	1.98E-01	7.13E-01	2.46E-01	-1.08E+01
GWP-biogenic	kg CO <sub>2</sub> eq	1.28E+00	2.51E-04	7.94E-02	4.20E-05	8.95E-05	1.94E-03	2.51E-05	3.02E-02
GWP-luluc	kg CO <sub>2</sub> eq	2.22E-01	2.45E-04	2.30E-05	2.25E-05	9.21E-05	7.30E-04	2.47E-05	6.72E-03
ODP	kg CFC-11 eq	3.02E-05	1.46E-07	1.23E-09	4.91E-08	4.46E-08	1.37E-07	6.77E-09	-8.40E-07
AP	mol H <sup>+</sup> eq	7.03E-01	2.47E-03	6.55E-05	2.39E-03	7.90E-04	5.34E-03	2.00E-04	-3.25E-02
EP-freshwater	kg P eq	5.70E-02	4.06E-05	3.25E-06	7.10E-06	1.49E-05	2.50E-04	3.70E-06	-3.79E-03
EP-marine	kg N eq	1.28E-01	7.72E-04	8.56E-05	1.06E-03	2.30E-04	1.85E-03	4.49E-03	-1.57E-03
EP-terrestrial	mol N eq	1.52E+00	8.36E-03	1.50E-04	1.16E-02	2.50E-03	1.99E-02	7.30E-04	-1.16E-01
POFP	kg NMVOC eq	4.85E-01	2.66E-03	6.08E-05	3.19E-03	7.70E-04	5.59E-03	2.60E-04	-6.58E-02
ADPMM	kg Sb eq	1.71E-03	2.19E-06	1.84E-07	1.15E-07	9.00E-07	2.90E-06	7.77E-08	8.88E-06
ADPFF	MJ, ncv	3.15E+03	9.76E+00	4.54E-01	3.20E+00	3.03E+00	1.44E+01	5.62E-01	-1.37E+02
WDP	m <sup>3</sup> world-eq dprv	1.14E+02	4.29E-02	3.94E-03	7.28E-03	1.51E-02	3.50E-01	2.38E-02	6.25E+00
<b>Environmental impacts (EN 15804 + A2) (additional)</b>									
GWP-GHG	kg CO <sub>2</sub> eq	2.14E+02	6.31E-01	9.61E-02	2.30E-01	1.98E-01	7.15E-01	2.46E-01	-1.08E+01
<b>Resource use</b>									
PERE	MJ	2.15E+02	1.34E-01	9.00E-02	1.77E-02	4.99E-02	1.06E+00	1.10E-02	5.34E+00
PERM	MJ	6.09E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	2.16E+02	1.34E-01	9.00E-02	1.77E-02	4.99E-02	1.06E+00	1.10E-02	5.34E+00
PENRE	MJ	3.08E+03	9.76E+00	4.54E-01	3.20E+00	3.03E+00	1.44E+01	5.62E-01	-1.37E+02
PENRM	MJ	6.84E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	3.15E+03	9.76E+00	4.54E-01	3.20E+00	3.03E+00	1.44E+01	5.62E-01	-1.37E+02
SM	kg	4.79E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	4.21E+00	2.85E-03	1.10E-04	2.20E-04	1.11E-03	2.64E-02	1.20E-04	1.69E-02
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m <sup>3</sup>	2.21E+00	1.09E-03	1.00E-04	1.80E-04	3.80E-04	8.68E-03	5.80E-04	1.48E-01
<b>Waste</b>									
HWD	kg	2.78E+02	2.11E-01	1.78E-02	3.40E-02	7.79E-02	1.08E+00	1.88E-02	-1.06E+01
NHWD	kg	2.66E+01	4.87E-01	4.10E-02	2.32E-03	1.24E-01	1.88E+01	2.10E+00	-5.81E-02
TRWD	kg	2.18E-01	1.90E-04	1.20E-04	3.61E-05	6.62E-05	1.55E-03	1.15E-05	5.42E-03
<b>Output flows</b>									
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	kg	1.47E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.64E+01	0.00E+00	0.00E+00
MER	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	3.20E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET	MJ	1.80E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

# Interpretation

---

Environmental impact potentials associated with the product stage (modules A1 – A3) are much greater than those associated with other modules; nevertheless, the results for the product stage should not be used without considering the results of module C.

Raw material production accounts for over 85% of the indicator totals in all categories. Because of the high significance of data about upstream activities, many of which are represented by generic data in the LCA, there is a moderate level of uncertainty in the indicator values obtained. The overall uncertainty is considered to be at least +/- 10 - 15% for the climate change category indicator values, and is likely higher for other categories.

Resource depletion indicators (ADPFF, ADPMM), stratospheric ozone depletion (ODP), water use (NFW) and water deprivation (WDP) potential should be used with particular caution.

No untreated wastes leave the modelled system, which includes waste treatment activities as required by EN 15804. The waste indicators HWD, NHWD and TRWD presented in this EPD therefore represent waste flows within the modelled system.

Energy used as raw materials is declared as an input to the module where it enters the product system in the PERM and PENRM indicators. Energy content remaining in materials that are landfilled or incinerated is not counted as energy leaving the system (in effect, it remains as part of the indicator for energy used for raw materials), therefore the sum of PENRM and PERM across Modules A1 – C4 will not be zero.

The reporting of Module D shows benefits as negative indicator values.

# Additional Information

## Additional Environmental Information

### TECHNISHIELD FAÇADE (with 52mm glass)

For information, indicator values calculated using the methods prescribed in the earlier version of EN 15804 (EN 15804+A1:2013) are provided in the table below for the declared unit of 1m<sup>2</sup> of Optima's Technishield Façade (52mm glass); modules A1 - A3 are shown on an aggregated basis.

Environmental Impacts (EN 15804 + A1)		Unit	A1 - A3	A4	A5	C1	C2	C3	C4	D
Global warming potential	GWP	kg CO <sub>2</sub> eq	2.09E+02	6.26E-01	5.97E-02	2.28E-01	1.96E-01	7.04E-01	1.75E-01	-1.02E+01
Depletion potential of the stratospheric ozone layer	ODP	kg CFC-11 eq	3.02E-05	1.46E-07	1.23E-09	4.91E-08	4.46E-08	1.37E-07	6.77E-09	-8.40E-07
Acidification potential of land and water	AP	kg SO <sub>2</sub> eq	6.02E-01	2.09E-03	6.62E-05	1.70E-03	6.20E-04	1.67E-02	5.70E-04	-2.51E-02
Eutrophication potential	EP	kg PO <sub>4</sub> <sup>3-</sup> eq	2.39E-01	4.35E-04	1.20E-04	3.90E-04	1.40E-04	1.44E-03	1.01E-02	-9.41E-03
Formation potential of tropospheric ozone photochemical oxidants	POCP	kg ethene eq	4.31E-02	8.13E-05	1.53E-05	3.72E-05	2.59E-05	1.40E-04	3.68E-05	-8.04E-03
Abiotic depletion potential for non-fossil resources	ADPE	kg Sb eq	1.71E-03	2.19E-06	1.84E-07	1.15E-07	9.00E-07	2.90E-06	7.77E-08	8.88E-06
Abiotic depletion potential for fossil resources	ADPF	MJ	3.15E+03	9.76E+00	4.54E-01	3.20E+00	3.03E+00	1.44E+01	5.62E-01	-1.37E+02

## Environmental Impacts - Best Case Product

### TECHNISHIELD FAÇADE (with 13mm glass)

The table below shows the environmental impact indicator results for 1m<sup>2</sup> of Optima's Technishield Façade incorporating 13mm laminated toughened safety glass, as the best-case product, for the modules for which the indicator values differ by more than 10% from the worst-case product. Note that glass is transported directly to the construction site from the producer and this transport is included in Module A2 rather than Module A4 (transport of the framework and other components from OPL to the construction site). For the best-case product, the mass of 1m<sup>2</sup> of product is 59kg.

Environmental Impacts (EN 15804 + A2)	Unit	A1 - A3	C3
GWP-GHG <sup>1</sup>	kg CO <sub>2</sub> eq	9.85E+01	3.96E-01
GWP-total	kg CO <sub>2</sub> eq	9.85E+01	3.96E-01
GWP-fossil	kg CO <sub>2</sub> eq	9.73E+01	3.95E-01
GWP-biogenic	kg CO <sub>2</sub> eq	1.06E+00	7.90E-04
GWP-luluc	kg CO <sub>2</sub> eq	1.41E-01	3.30E-04
ODP	kg CFC-11 eq	1.20E-05	7.39E-08
AP	mol H <sup>+</sup> eq	3.41E-01	3.09E-03
EP-freshwater	kg P eq	2.93E-02	1.00E-04
EP-marine	kg N eq	6.85E-02	1.16E-03
EP-terrestrial	mol N eq	7.48E-01	1.25E-02
POFP	kg NMVOC eq	2.85E-01	3.48E-03
ADPMM <sup>2</sup>	kg Sb eq	6.20E-04	1.23E-06
ADPFF <sup>2</sup>	MJ, ncv	1.53E+03	7.63E+00
WDP <sup>2</sup>	m <sup>3</sup> world-eq dprv	4.42E+01	1.41E-01

1 - GWP-GHG includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013

2 - The results of this environmental impact indicator shall be used with care because either the uncertainties associated with the results are high or there is limited experience with the indicator

# References

---

ecoinvent database (v3.8) - [www.ecoinvent.ch](http://www.ecoinvent.ch)

Characterisation Factors for Use with EN15804 (EF 3.0)  
<https://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>

EN 15804:2012 + A1:2013 and EN 15804:2012 + A2:2019/AC2021 - Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products

General Program Instructions for The International EPD® System, Version 4.0, 2021-03-29 - The International EPD® System - EPD International AB

ISO 9001:2015 - Quality management system. Requirements

ISO 14001:2015 - Environmental management systems – Requirements with guidance for use

ISO 14025:2009-11: Environmental labels and declarations - Type III environmental declarations - Principles and procedures

PCR 2019:14 Construction products, Version 1.3.4, 2024-04-30 - The International EPD® System - EPD International AB.

Technishield Façade LCA - Report for Optima Products Limited - EuGeos Limited (July 2024)

## Glossary

The International EPD® System (IES): a programme for Type III environmental declarations, maintaining a system to verify and register EPD®s as well as keeping a library of EPD®s and PCRs in accordance with ISO 14025. ([www.environdec.com](http://www.environdec.com))

Life cycle assessment (LCA): LCA studies the environmental aspects and quantifies the potential impacts (positive or negative) of a product (or service) throughout its entire life. ISO standards ISO 14040 and ISO 14044 set out conventions for conducting LCA.

REACH Regulation: REACH is the European Regulation on Registration, Evaluation, Authorisation and Restriction of Chemicals. It entered into force in 2007, replacing the former legislative framework for chemicals in the EU.

REGO: Renewable Energy Guarantees of Origin. These are certificates issued to generators of renewable electricity in the UK, showing the proportion of renewable energy in the fuel mix disclosure of suppliers.



# Optima

Courtyard House  
West End Road  
High Wycombe  
Buckinghamshire  
HP11 2QB

T. +44 1494 492725 | E. [Action@OptimaSystems.com](mailto:Action@OptimaSystems.com)  
**W. [OptimaSystems.com](https://www.OptimaSystems.com)**

© Optima Products Limited