

# Technishield 25 & 54 Product Summary

## Product Facts

- Both Technishield 25 and Technishield 54 can achieve up to 30 minutes integrity and insulation using 15mm thick Optima fire glass
- Minimal framing - 25mm or 54mm wide head track respectively
- Technishield 25 designed to have common appearance with Optima 117 plus
- Technishield 54 integrates seamlessly with Revolution 54 system
- Glass doors available to achieve 30 minutes integrity-only
- Maximum height 2850mm
- Maximum panel width 1000mm

## Also Available within Technishield Range:

- Technishield 50 (30 minutes integrity only or 60 minutes integrity only)
- Technishield 65 (30 minutes integrity and insulation or 60 minutes integrity and insulation)


## Acoustics

- Rw37dB using 15mm thick 30/30 fire glass in single glazed multi-modulescreen

## Deflection


- Technishield is designed to accommodate 0 to +/- 25mm deflection as standard

**HEAD TRACK  
CENTRAL SINGLE GLAZED**

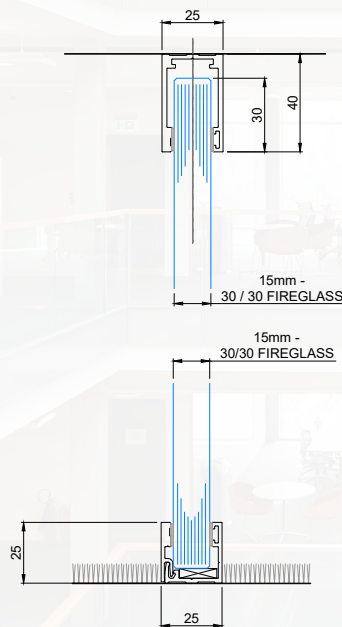

**CENTRAL SINGLE GLAZED  
FLOOR TRACK 25mm x 25mm  
WITH CLIP-IN BEAD**

**HEAD TRACK  
CENTRAL SINGLE GLAZED**

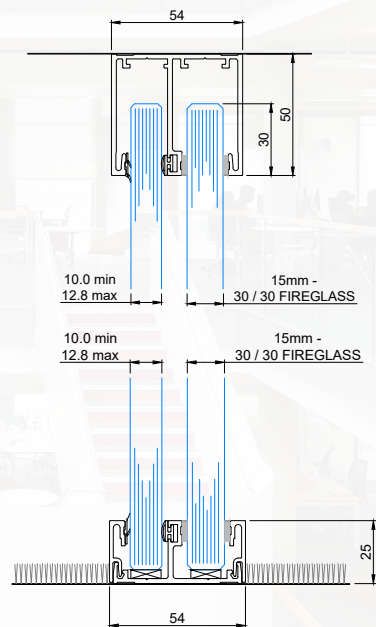

**50mm HEAD TRACK  
DOUBLE GLAZED**

